



### GLOSS BLACK ADJUSTABLE TOUR-TECH CRUISE MOUNTS WITH TRIDENT DUALY PEGS

7583

#### Thank You For Choosing Kuryakyn!

Protect yourself and others from potential injury and property damage or loss. Pay close attention to all instructions, warnings, cautions, and notices regarding the installation, use, and care of this product.

#### **WARNING**

THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

#### **NOTICE**

This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality or damage the product itself or the product to which it is being attached.

#### ENSURE THAT THE FOLLOWING PARTS HAVE BEEN INCLUDED IN THE KIT:

- 2 Gloss Black Adjustable Tour-Tech Cruise Mounts with Trident Dually Pegs
- 2 #10-24 Set Screws
- 1 Anti-Seize Packet
- 1 Installation Instructions

#### YOU WILL ALSO NEED:

Set of Hex Wrenches

#### **NOTICE**

These installation instructions contain important information. Ensure that the end user receives this copy and is aware of its importance for future use.

- STEP 1** Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn **IGN OFF**. Allow the engine and exhaust system to cool. Remove the main fuse.

#### **WARNING**

THE END USER'S SAFETY DEPENDS UPON PROPER INSTALLATION OF THIS PRODUCT. IF A STEP IN THESE INSTRUCTIONS IS NOT WITHIN YOUR CAPABILITIES OR YOU DO NOT HAVE THE CORRECT TOOLS, HAVE YOUR DEALER PERFORM THE PROCEDURE. IMPROPER INSTALLATION OF THIS PRODUCT COULD RESULT IN DEATH OR SERIOUS INJURY.

ACCIDENTAL VEHICLE START-UP COULD CAUSE DEATH OR SERIOUS INJURY, REMOVE THE MAIN FUSE BEFORE PROCEEDING.


- STEP 2** Determine the desired position of the Tour Tech™ mounts on the engine guard.

- STEP 3** Refer to **PIC 1**. Remove the 1/2"-20 screw from the mount. Note the splines on the arm and clamp that allow for additional adjustment.

#### **NOTICE**

Determine the mounting location and orientation of the Tour Tech mounting clamp before fully tightening the clamp screw. The Tour Tech mounting clamp may leave marks when tightened.

- STEP 4** Refer to **PIC 1**. Fold the clamp around the engine guard in the desired location. Ensure the head of the hinge pin is on top. The splined face of the clamp should face away from the bike.

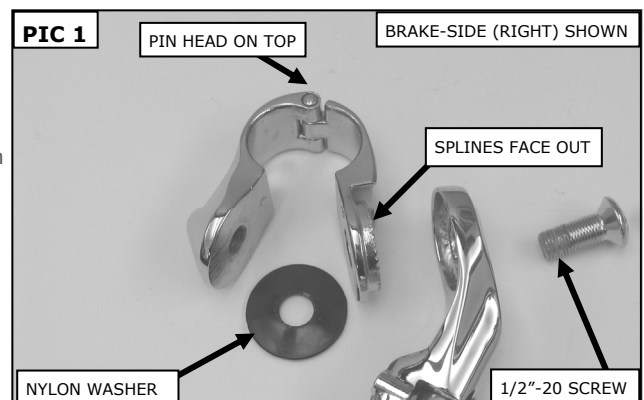

**STEP 5** Re-install the arm on the clamp. Position the nylon washer between the clamp halves as shown in **PIC 2**.

**NOTE:** The washer is cosmetic only. When the clamp is tightened, the “ears” of the clamp may not touch the washer.

### NOTICE

Anti-Seize aids in the future removal of fasteners. Apply the included Anti-Seize directly to the treads of all installed fasteners. Do not use Anti-Seize on fasteners with thread locking compound applied.

**STEP 6** Refer to **PIC 3**. Position the offset arm to your liking. Install and tighten the 1/2” screw.

**STEP 7** Position the footrest as desired. Tighten the 5/16” screw in the end of the footrest. The male mount will seat itself into the footrest and keep it from rotating.

**NOTE:** Ensure that the footrests do not contact other parts when folded up.





### ⚠ WARNING

POSITION THE TOUR TECH ARMS AND FOOTRESTS SO THEY DO NOT INTERFERE WITH THE OPERATION OF THE FOOT CONTROLS. INTERFERENCE WITH THE FOOT CONTROLS MAY CAUSE LOSS OF CONTROL RESULTING IN SERIOUS INJURY OR DEATH.

ENSURE THAT THERE IS PROPER GROUND CLEARANCE FOR CORNERING. LOSS OF CONTROL OF THE MOTORCYCLE AND SERIOUS INJURY MAY OCCUR IF THE FOOTREST/ARM IS NOT POSITIONED PROPERLY. REPOSITION THE TOUR TECH™ MOUNT IF NECESSARY SO THAT THERE IS ADEQUATE CORNERING CLEARANCE.

**STEP 8** Refer to **PIC 4**. Install the included set screws in the lower holes on the Tour Tech™ arms. Turn the set screws in or out to adjust the angle of the footrest.

**STEP 10** Periodically check the tightness of all fasteners.

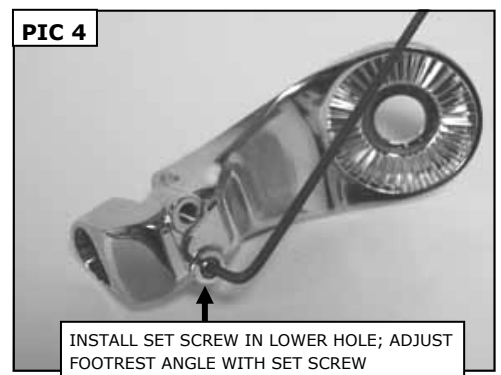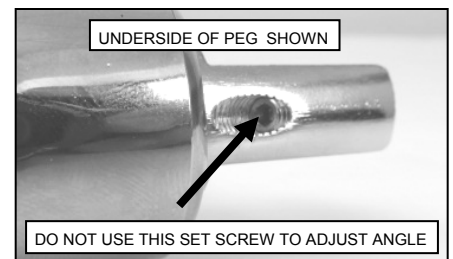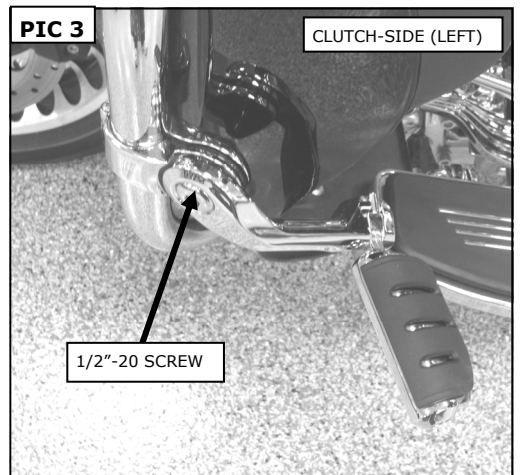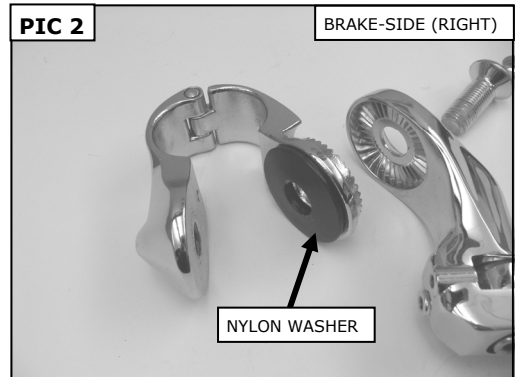



### TIPS FOR PROPER GLOSS BLACK FINISH CARE:

Your new product has a Gloss Black finish and requires special attention when cleaning. Some cleaning products or procedures can actually damage the Gloss Black finish.

Thoroughly clean the product often with a soft cloth, mild soap and water. Regular cleaning keeps contaminants from building up.

Rinse thoroughly with fresh water.

**USE ONLY** protection products that are formulated for Satin finishes.

**DO NOT USE** bleach or chlorides to clean the Gloss Black product.

**DO NOT USE** products containing abrasives to clean the product. **NEVER** use steel or brass wool, wire brushes, polishing wheels, rubbing or polishing compounds on the product.

### **WARNING**

**BEFORE RIDING**, ENSURE THAT THE INSTALLATION OF THIS PRODUCT DOES NOT INTERFERE WITH THE PROPER OPERATION OF THE MOTORCYCLE.

### **NOTICE**

It is the end user's responsibility to ensure that all fasteners (including pre-assembled) are tightened before operation of the motorcycle. Kuryakyn will not provide warranty coverage on products or components lost or damaged due to improper installation or lack of maintenance. Periodic inspection and maintenance are required on all fasteners.

#### LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials & workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

1. Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
2. The product must be properly installed, maintained & operated under normal conditions.
3. Kuryakyn shall not be liable for any consequential & incidental damages, including labor & paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn & a customer.
4. Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
5. Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'s contained in components of Kuryakyn products will be warranted for defects in materials & workmanship for 3 years from the date of purchase whereas all other components shall be warranted for one (1) year.
6. Merchandise purchased directly from Internet auction sites or any other third party seller is considered sold as is & shall not carry a Kuryakyn warranty. All warranty claims must be directed to the original seller. If unsure please contact the seller to verify they are an authorized Kuryakyn retailer.

#### RETURN POLICY

Merchandise determined to be defective may be returned up to one year from the date of purchase. Returns must be processed through original seller. Returned merchandise for any other reason other than warranty claims must be in like new condition & subject to a 20% restocking fee. All returns are subject to inspection for determination of full or partial credit. Any returned part that shows evidence of being used or installed contrary to manufacturer's instructions, &/or subjected to improper handling, packaging or return shipping by the customer, will not be eligible for exchange, refund or warranty consideration. All returned electrical items will be inspected & tested. If electrical item is deemed functional, no credit will be issued & item will be returned. All sales are final on discontinued or closeout merchandise.