

### TEARDROP MIRRORS, CHROME

1707

#### Thank You For Choosing Kuryakyn!

Protect yourself and others from potential injury and property damage or loss. Pay close attention to all instructions, warnings, cautions, and notices regarding the installation, use, and care of this product.

#### NOTICE

This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality or damage the product itself or the product to which it is being attached.

#### ENSURE THAT THE FOLLOWING PARTS HAVE BEEN INCLUDED IN THE KIT:

- 1 Left Mirror Assembly
- 1 Right Mirror Assembly
- 1 Hardware Kit, Including:
  - 2 5/16"-18 X 1-1/2" Socket Head Cap Screws
  - 2 5/16"-18 X 2" Socket Head Cap Screws
  - 2 5/16" Split Lock Washers
  - 2 5/16" Internal Tooth Lock Washers
  - 2 Double End Threaded Studs
- 1 Installation Instructions

#### YOU WILL ALSO NEED:

Set of hex wrenches, set of combination wrenches

- STEP 1** Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn **IGN OFF**. Allow the engine and exhaust system to cool. Remove the main fuse.

#### NOTICE

These installation instructions contain important information. Ensure that the end user receives this copy and is aware of its importance for future use.

- STEP 2** Remove both existing mirrors from the lever mounts; set them aside, they will not be re-used.

#### NOTICE


Avoid damage to the motorcycle. Protect painted surfaces with a soft cloth or blanket.

#### MOUNTING WITH SINGLE SCREW (TYPICAL):

- STEP 3** Determine which of the included Socket Head Cap Screws from the hardware kit will provide maximum thread engagement in the mirror stem without bottoming out.
- STEP 4** Refer to **FIG 1**. Place a Split Lock Washer over the Screw and insert it through the hole in the lever mount.
- STEP 5** Place an Internal Tooth Lock Washer over the protruding end of the Screw.
- STEP 6** While holding the mirror in place, thread the Screw into the bottom of the mirror stem.

**NOTE:** Ensure that the Setscrew in the mirror stem does not prevent the Screw from being installed fully. **FIG 1**

- STEP 7** Adjust the position of the mirror stem for visibility and clearance; tighten the Screw and then the Setscrew.
- STEP 8** Repeat **STEP 3 through STEP 7** for the other side.
- STEP 9** Adjust the Mirrors for proper view before riding the motorcycle.

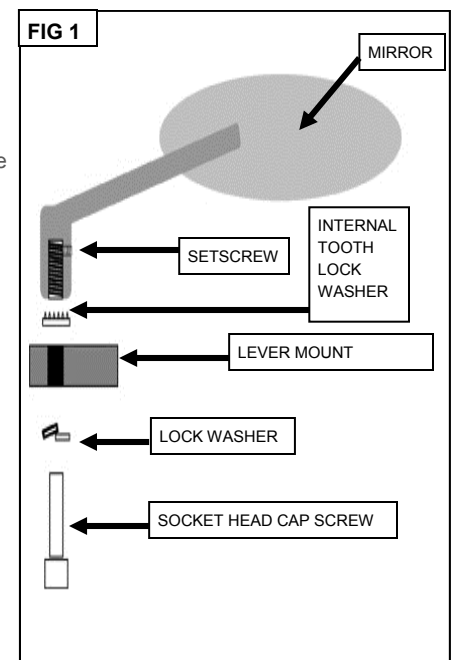

### H-D WITH BOTTOM MOUNTED TURN SIGNALS—RIGHT SIDE PROCEDURE:

**STEP 10** Refer to FIG 2. Screw a Double Ended Stud into the new mirror stem; tighten and then tighten the Setscrew.

**NOTE:** Refer to FIG 2. Ensure that the Setscrew in the mirror stem does not prevent the Double Ended Stud from being installed fully.

**STEP 11** Secure the turn signal; remove the existing mirror.

**STEP 12** Loosen and remove the retainer nut and ball stud clamp shown in FIG 2.

**STEP 13** Refer to FIG 2. Place an Internal Tooth Lock Washer over the long end of one of the Double Ended Studs; insert the assembly into the mirror stem hole in the lever mount.


**STEP 14** Place a Split Lock Washer over the protruding end of the Double Ended Stud and thread the retainer nut onto the stud. FIG 2

**STEP 15** Adjust the position of the mirror stem for visibility and clearance; tighten the retaining nut.

**STEP 16** Install the ball stud clamp onto the retainer nut; adjust the turn signal and tighten the clamp.

**STEP 17** Repeat **STEP 10 through STEP 16** for the LEFT SIDE.

**STEP 18** Adjust the mirrors for proper view before riding the motorcycle.

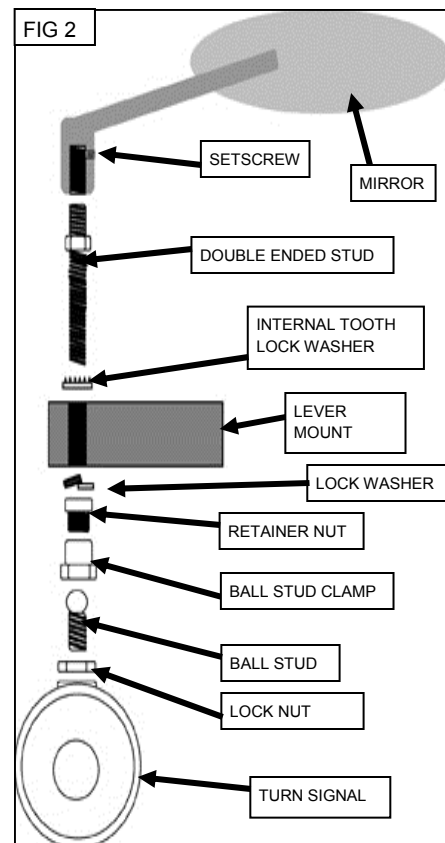

### NOTICE

Ensure that the position of the mirror and stem DO NOT interfere with the operation of the motorcycle hand controls.

It is the end user's responsibility to ensure that all fasteners (including pre-assembled) are tightened before operation of the motorcycle. Kuryakyn will not provide warranty coverage on products or components lost or damaged due to improper installation or lack of maintenance. Periodic inspection and maintenance are

#### LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials & workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

1. Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
2. The product must be properly installed, maintained & operated under normal conditions.
3. Kuryakyn shall not be liable for any consequential & incidental damages, including labor & paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn & a customer.
4. Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
5. Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'s contained in components of Kuryakyn products will be warranted for defects in materials & workmanship for 3 years from the date of purchase whereas all other components shall be warranted for one (1) year.
6. Merchandise purchased directly from Internet auction sites or any other third party seller is considered sold as is & shall not carry a Kuryakyn warranty. All warranty claims must be directed to the original seller. If unsure please contact the seller to verify they are an authorized Kuryakyn retailer.

#### RETURN POLICY

Merchandise determined to be defective may be returned up to one year from the date of purchase. Returns must be processed through original seller. Returned merchandise for any other reason other than warranty claims must be in like new condition & subject to a 20% restocking fee. All returns are subject to inspection for determination of full or partial credit. Any returned part that shows evidence of being used or installed contrary to manufacturer's instructions, &/or subjected to improper handling, packaging or return shipping by the customer, will not be eligible for exchange, refund or warranty consideration. All returned electrical items will be inspected & tested. If electrical item is deemed functional, no credit will be issued & item will be returned. All sales are final on discontinued or closeout merchandise.